

Arlon® 1000 Sealing Solutions

Compound No./Material Name: Arlon® 1000	Material Description: Polyketone, Virgin MIL-P-46183, TYPE I <small>(with exceptions, contact Greene Tweed Engineering)</small>	Manufacturing Method: Injection Molded
---------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------

Description	Typical
Physical & Mechanical Properties (ASTM Standard)	
Color	Tan
Specific Gravity (D792)	1.30
Hardness, Shore D, Points (D2240)	88
Hardness, Rockwell M, Points (D785)	104
Tensile Yield Strength, psi [MPa] (D638)	15,600 [107.6]
Tensile Break Strength, psi [MPa] (D638)	14,000 [96.5]
Tensile 0.5% Secant Modulus, psi [MPa] (D638)	615,000 [4,240.3]
Elongation, % (D638)	35
Flexural Strength, psi [MPa] (D790)	25,300 [174.4]
Flexural 0.5% Secant Modulus, psi [MPa] (D790)	600,000 [4,136.9]
Shear Strength, Axial, psi [MPa] (D732)	12,400 [85.5]
Shear Strength, Transverse, psi [MPa] (D732)	12,400 [85.5]
Compressive Strength @ Break, psi [MPa] (D695)	19,000 [131.0]
Deformation Under Load, % (D621)	0.09
Heat Deflection Temperature @ 264 psi, °F [°C] (D648)	350 [177]
Coefficient of Dynamic Friction, PV=12,600 psi-ft/min [2250.1 kg/cm] (G77)	0.29
Wear Factor, Modified ASTM G77, 10 ⁻¹⁰ in. ³ -min/(lb-ft-hr) (G77)	52
Coefficient of Thermal Expansion, < 300°F (149°C) 10 ⁻⁶ in./(in°F) [10 ⁻⁶ cm/(cm°C)] (E228)	26 [46.8]
Coefficient of Thermal Expansion, > 300°F (149°C) 10 ⁻⁶ in./(in°F) [10 ⁻⁶ cm/(cm°C)] (E228)	75 [135]


Contact Us

Greene Tweed
Kulpsville, PA, USA

Tel: +1.215.256.9521
Fax: +1.215.256.0189

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2019, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

03/19-GT TPS-US-LS-006

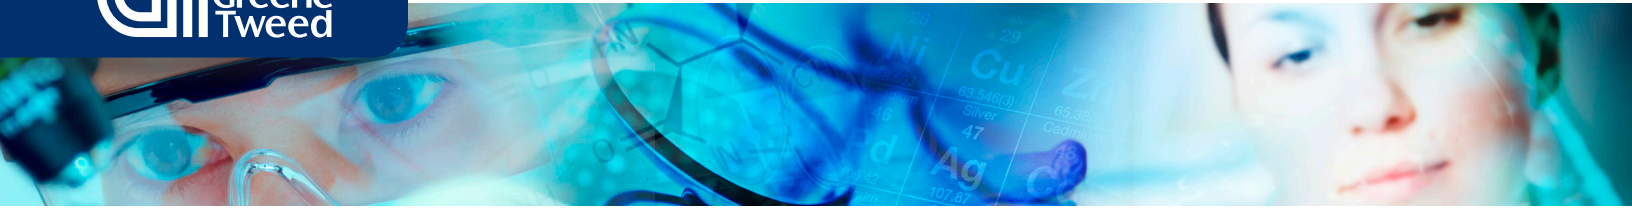

Compound No./Material Name: Arlon® 1000	Material Description: Polyketone, Virgin MIL-P-46183, TYPE I (with exceptions, contact Greene Tweed Engineering)	Manufacturing Method: Injection Molded
---------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------

Description		Typical	
High-Temperature Properties (ASTM Standard)			
Temperature	Tensile Yield Strength, psi [MPa] (D638)	Tensile Break Strength, psi [MPa] (D638)	Flexural Strength @ 5% Strain, psi [MPa] (D790)
75°F (24°C)	14,900 [102.73]	14,100 [97.22]	25,700 [177.19]
200°F (93°C)	11,000 [75.84]	10,500 [72.39]	19,700 [135.83]
250°F (121°C)	– [–]	– [–]	16,600 [114.45]
300°F (149°C)	6,900 [47.57]	7,500 [51.71]	10,500 [72.39]
350°F (177°C)	5,000 [34.47]	6,500 [44.82]	4,000 [27.58]
400°F (204°C)	4,200 [28.96]	6,300 [43.44]	3,400 [23.44]
500°F (260°C)	2,600 [17.93]	6,100 [42.06]	2,300 [15.86]
600°F (316°C)	1,900 [13.10]	4,300 [29.65]	700 [4.83]
Temperature	Flexural Modulus, psi [MPa] (D790)	Shear Yield Strength, psi [MPa] (D732)	Max. Shear Strength, psi [MPa] (D732)
75°F (24°C)	654,000 [4,509.2]	10,000 [68.9]	12,700 [87.6]
200°F (93°C)	595,700 [4,107.2]	7,700 [53.1]	9,700 [66.9]
250°F (121°C)	582,000 [4,012.7]	6,700 [46.2]	8,200 [56.5]
300°F (149°C)	453,000 [3,123.3]	5,300 [36.5]	6,800 [46.9]
350°F (177°C)	87,600 [541.9]	3,100 [21.4]	4,900 [33.8]
400°F (204°C)	76,000 [524.0]	2,400 [16.5]	4,100 [28.3]
500°F (260°C)	50,300 [346.8]	1,400 [9.7]	3,300 [22.8]
600°F (316°C)	18,500 [127.6]	450 [3.1]	2,300 [15.9]


Contact Us

Greene Tweed
Kulpsville, PA, USA

Tel: +1.215.256.9521
Fax: +1.215.256.0189

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2019, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

03/19-GT TPS-US-LS-006

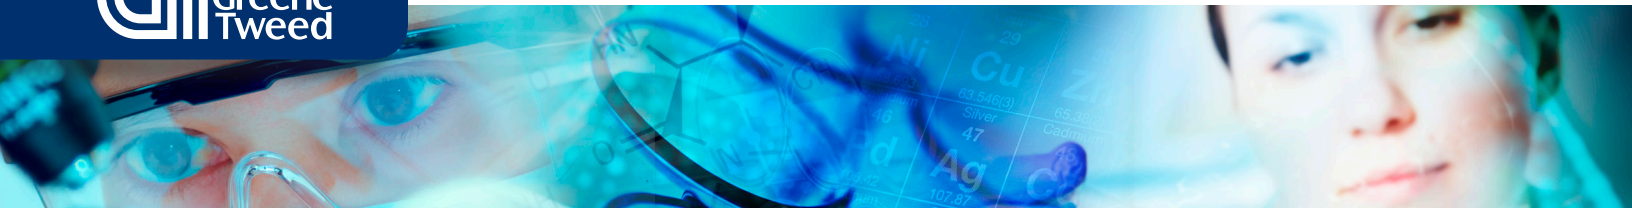

Compound No./Material Name: Arlon® 1000	Material Description: Polyketone, Virgin MIL-P-46183, TYPE I <small>(with exceptions, contact Greene Tweed Engineering)</small>	Manufacturing Method: Injection Molded
---------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------

Description		
ICP - Mass Spectrometry Analysis		
Element	TM/Poly Material, ppb	Leachable TM/SC1, ppb
Aluminum	360	0.9
Calcium	8,900	*
Chromium	510	0.2
Copper	55	0.2
Iron	4,300	3.6
Potassium	980	*
Magnesium	380	0.1
Sodium	130,000	0.6
Nickel	600	*
Lead	53	*
Tin	*	*
Titanium	75	*
Zinc	56	*

Note: Specification: MIL-P-46183, Type I, with exceptions, contact Greene Tweed Engineering.
** Analysis revealed that the element was not found at or above the detection limit for the test.*

Contact Us

Greene Tweed Tel: +1.215.256.9521
 Kulpsville, PA, USA Fax: +1.215.256.0189

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
 © 2019, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

03/19-GT TPS-US-LS-006