

Arlon[®]-Based CMP Retainer Rings

High-Performance Materials and Precision Design

Plastic Components


Greene Tweed's CMP retainer rings are formulated, designed, and machined to meet the unique customer-specific requirements demanded by Chemical Mechanical Planarization (CMP) processes. Manufactured from a full range of chemical-resistant materials, including Greene Tweed's own Arlon[®] (polyketone-based) material and other compounds, these high-performance thermoplastics are ideal for applications requiring exceptional strength, wear resistance, and purity.

Recommended Process Applications

Chemical	Concentration Weight %	Temperature Range	
		< 275°F (135°C)	> 275°F (135°C)
Acetic Acid	10	1	1
Ammonia	Conc.	1	1
Ammonium Chloride	37	1	1
Ammonium Hydroxide	10	1	3-4
Nitric Acid	10	1	1-2
Oxalic Acid	10	1	1
Potassium Hydroxide	10	1	2
Sulfuric Acid	<40	2	2

Legend

- 1 – No attack, possibly slight absorption. Negligible effect on mechanical properties.
 - 2 – Slight attack by absorption. Some swelling and a small reduction in mechanical properties likely. May limit load bearing capabilities under tension.
 - 3 – Moderate attack or appreciable absorption. Material may have limited life. Applications involving tensile stress not recommended.
 - 4 – Material will dissolve or suffer chemical attack in a short time.
- Conc. – Concentrated Aqueous Solution

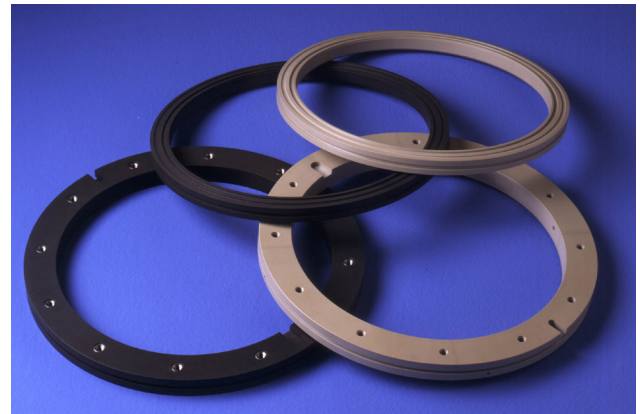

Features and Benefits

- Excellent chemical resistance
- Various high-performance blends

Description

- Arlon[®] 1000—Virgin polyketone-based
- Arlon[®] 1260—Carbon-fiber reinforced polyketone-based
- Arlon[®] 1286—Carbon-fiber reinforced polyketone-based
- Arlon[®] 1330—PTFE-filled polyketone-based

Contact Us

Greene Tweed
Kulpsville, PA, USA

Tel: +1.215.256.9521
Fax: +1.215.256.0189

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2018, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

10/18-GT DS-US-SC-053

Typical Properties

Physical Properties	Arlon® 1000	Arlon® 1260	Arlon® 1286	Arlon® 1330	Typical PPS*	Typical PC**
Color	Natural	Black	Black	Tan	Tan	Varies
Specific Gravity	1.30	1.41	1.49	1.38	1.35	1.20
Melt Point (Pellet), °F (°C)	649 (343)	649 (343)	649 (343)	649 (343)	540 (282)	Not Applicable
Hardness, Shore D	88	92	93	85	85	75
Water Absorption, 24 Hours, %	0.5	0.08	0.08	0.35	0.05	0.15
Mechanical						
Tensile Break Strength, psi	14,000	33,400	37,700	12,600	12,000	10,000
Elongation, %	35.0	1.7	1.3	20	15	94
Flexural Strength, psi	25,300	50,300	56,800	21,100	21,000	13,500
Flexural 0.5% Secant Modulus, psi	600,000	2,750,000	4,040,000	535,000	575,000	340,000
Coefficient of Dynamic Friction PV=12,600 psi ft/min.	0.29	0.18	0.14	0.15	0.40	0.38
Izod Impact Strength Notched, ft-lb/inch	1.18	1.65	1.06	1.06	0.60	2.70
Thermal						
Heat Distortion Temperature Under Load, @ 264 psi, °F (°C)	350 (177)	600 (316)	600 (316)	330 (166)	250 (121)	275 (135)
Coefficient of Thermal Expansion, <300°F (149°C), inch/inch per °F x 10 ⁻⁵	2.6	0.7	0.5	2.3	2.8	3.8

* PPS – Polyphenylene sulfide

** PC – Polycarbonate

Contact Us

Greene Tweed
Kulpsville, PA, USA

Tel: +1.215.256.9521
Fax: +1.215.256.0189

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2018, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

10/18-GT DS-US-SC-053