


NBR (Nitrile)

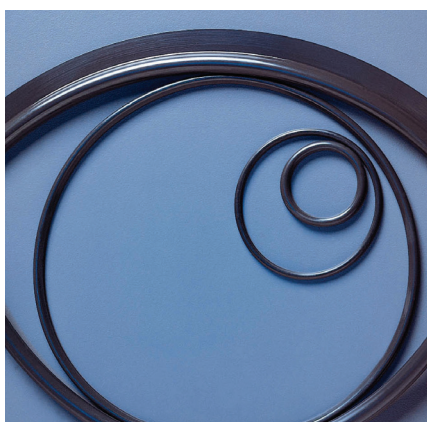

Oil and Fuel Resistant

The NBR (Nitrile Butadiene Rubber) family is most notable for its high resistance to oils, fuels, and other chemicals. It has a wide temperature range from -60°F to 300°F (-51°C to 149°C), but lacks the strength and flexibility of other materials.

Greene Tweed engineers work with customers to determine the best elastomer for each application. With a complete line of proprietary and nonproprietary compounds, our goal is to provide the most cost-effective and efficient solutions for our customers' individual requirements.

Applications

- O-rings
- V-rings
- T-seals

Contact Us

Greene Tweed
Houston, TX, USA

Tel: +1.281.765.4500
Fax: +1.281.821.2696

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2018, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

EN-DS103-US-08-30-2016