


Seal-Connect® XCD

High-Pressure/High-Temperature

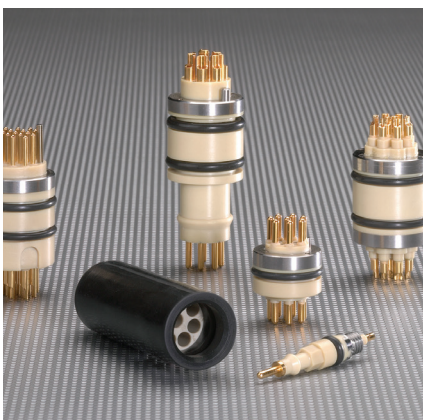

Features and Benefits

- A variety of pin materials (e.g. standard beryllium copper pins, corrosion resistant Inconel or high-conductivity, oxygen-free copper) allows customers to choose the material that will provide the highest conductivity and reliability possible for their applications
- Reliable data transfer in pressures up to 30,000 psi (2068 bar) and temperatures as high as 500°F (260°C) allows customers to meet exploration challenges
- Connector designs use Arlon® material to protect signals from degradation in elevated temperatures

Real-Time Data Solutions

To help service companies meet the need for reliable data and power transmission in extreme temperatures and pressures, Greene Tweed is expanding our line of Seal-Connect® electrical connector technology. Our revolutionary, customer-driven technology, Seal-Connect® XCD, allows our customers to reliably transfer data in increasing temperature requirements.

XCD withstands temperatures up to 500°F (260°C) in continuous service at 30,000 psi (2,068 bar). The XCD connector helps users meet exploration challenges inherent in drilling in extreme temperatures, higher pressures, and increased sour gas exposure.

Unlike traditional glass-to-metal sealed designs that involve firing a pin into a metal body with sealing glasses, Greene Tweed's Seal-Connect® XCD 30,000 psi (2,068 bar) @ 500°F (260°C) connector design features our injectionmolded Arlon® 2000 thermoplastic material. Arlon® materials have been used as insulators in the oilfield industry for over 20 years. While glass materials are good insulators, high temperatures lead to degradation in the electrical insulation resistance. Because the pins are in such close proximity to the surrounding conductive body, signal loss or degradation is possible. However, Seal-Connect® designs featuring Arlon® provide the insulation resistance necessary to protect signals in highly elevated temperatures.

Contact Us

Greene Tweed
Houston, TX, USA

Tel: +1.281.765.4500
Fax: +1.281.821.2696

Statements and recommendations in this publication are based on our experience and knowledge of typical applications of this product and shall not constitute a guarantee of performance nor modify or alter our standard warranty applicable to such products.
© 2018, Greene Tweed all rights reserved. All trademarks are property of their respective owners.

10/18-GT DS-US-OF-153